


## Eurotrust V Safes

The new series of Eurotrust safes has successfully qualified for level V certification according to the class V (EN 1143-1/A2P-France) European certifications rules.

In order to satisfy various needs this series presents six different models in size, capacity and weight.

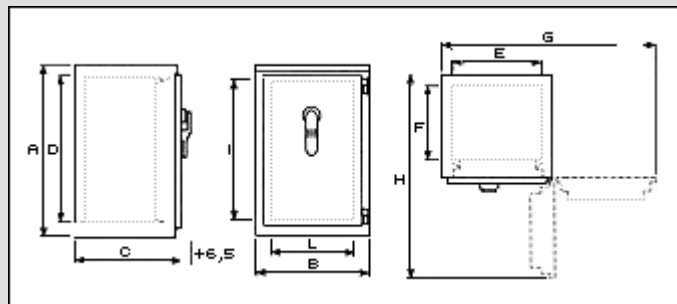

MODEL	weight (Kg)	volume (dmc)	shelves	A	B	C	D	E	F	G	H	I	L
ET015z	760	148	2	100,5	62	66,5	82	43	42	112	117	77,5	38,5
ET025z	1080	253	3	132,5	72	66,5	114	53	42	132	127	109,5	48,5
ET030z	1200	298	3	152,5	72	66,5	134	53	42	132	127	129,5	48,5
ET035z	1350	367	3	140,5	89	67,5	122	70	43	167	145,5	117,5	65,5
ET045z	1560	469	3	174,5	89	67,5	156	70	43	167	145,5	151,5	65,5
ET055z	1800	554	4	197,5	89	67,5	179	70	43	167	145,5	174,5	65,5

### ARMoured SHEETING

The main feature of Eurotrust safes is the excellent level of resistance of Rockmet® conglomerate (Conforti's patent). Manganese steel plates are inserted into the door to protect all locking mechanisms and locking points. The door has a projection of 5 cm from the body of the safe.

### BOLT WORK

Every EUROTRUST safe is equipped with a PKL key lock with changeable key, and a 4-wheel combination lock (80 million changes). Bolts are made of heavy and thick rectangular bars, which can be 2 or 3 on the side opposite to the hinges (depending on the model) and 1 on the upper and lower side of the door. EUROTRUST safes have 2 holes at the bottom and 1 hole at the back for floor and/or wall anchorage.

### FINISHES

Colour: grey RAL 7031