


## Eurotrust III Safes

The new series of EUROTRUST safes has successfully passed all tests to qualify for class III certification according to the class III (EN1143-1/A2P-France) European certification rules.

In order to satisfy various needs this series presents seven different models in size, capacity and weight.

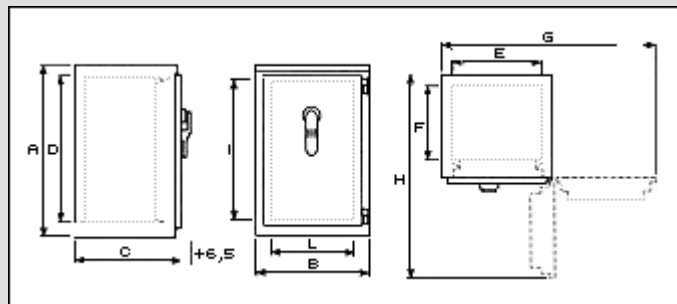

MODEL	weigh (Kg)	volume (dmc)	shelves	A	B	C	D	E	F	G	H	I	L
ET010	635	101	2	92,5	62	56,5	74	43	32	112	107	69,5	38,5
ET015	765	148	2	100,5	62	66,5	82	43	42	112	117	77,5	38,5
ET025	1055	253	3	132,5	72	66,5	114	53	42	132	127	109,5	48,5
ET030	1185	298	3	152,5	72	66,5	134	53	42	132	127	129,5	48,5
ET035	1300	367	3	140	89	67.5	122	70	43	167	145,5	151,5	65,5
ET045	1500	469	3	174	89	67.5	156	70	43	167	145,5	179,5	65,5
ET055	1700	554	4	197	89	67.5	179	70	43	167	145,5	174,5	65,5

ARMoured SHEETING	BOLT WORK	FINISHES
<p>The main feature of Eurotrust safes is the excellent level of resistance of Rockmet® conglomerate (Conforti's patent). Manganese steel plates are inserted into the door to protect all locking mechanisms and locking points. The door has a projection of 5 cm from the body of the safe.</p>	<p>Every EUROTRUST safe is equipped with a PKL key lock with changeable key, and a 3-wheel combination lock (1 million changes). Bolts are made of heavy and thick rectangular bars, which can be 2 or 3 on the side opposite to the hinges (depending on the model) and 1 on the upper and lower side of the door.</p> <p>EUROTRUST safes have 2 holes at the bottom and 1 hole at the back for floor and/or wall anchorage.</p>	<p>Colour: grey RAL 7031</p>